



GLOBAL GREEN CORPORATION

LED Easy Connect Linear Highbay

Linkable LED Linear Highbay

40W


4400lm

110lm/W

50000hrs


FEATURES

- Direct line voltage 100-277AC
- Replaces Conventional Suspended Mount Commercial Lighting
- Instant on
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 4000K, 5000K or 6000K
- Frosted lens for uniform diffuse appearance
- Up to 80% energy savings
- Ultra-high performance LED delivers 140 lpw
- Suitable for Wet Locations
- Motion Sensor Available
- Zigbee Integration Available
- Microwave Sensor Available

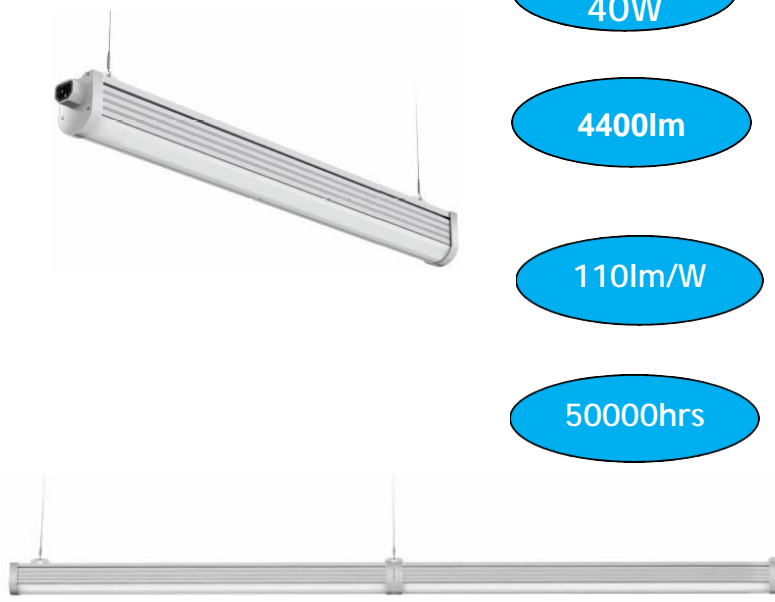

DIMENSIONS

APPLICATIONS

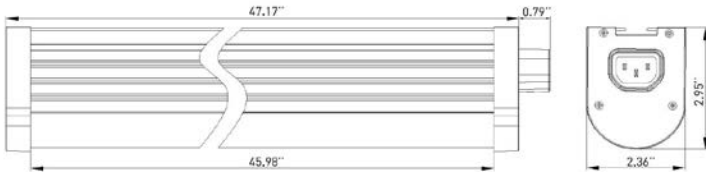

- Supermarket
- Retail
- Industrial
- Commercial

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
40W	AC120-277V	4400 lm	120 degrees	4000K/5000K/ 6000K	>80
Efficiency	PF	Type	IP	Rated Life	Approvals
110lm/W	>0.95	EC1	65	50000hrs	UL/cUL,

ORDERING GUIDE

Example: GG-EC1-40W-850-CM

Company	Type	Watts	CCT	Cover
GG - Global Green	EC1	40W	840 - CRI80, 4000K 850 - CRI80, 5000K 860 - CRI80, 6000K	CM- Cilieng Mount SM- Surface Mount



LED Easy Connect Linear Highbay

Linkable LED Linear Highbay

60W


6600lm

110lm/W


50000hrs

FEATURES

- Direct line voltage 100-277AC
- Replaces Conventional Suspended Mount Commercial Lighting
- Instant on
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 4000K, 5000K or 6000K
- Frosted lens for uniform diffuse appearance
- Up to 80% energy savings
- Ultra-high performance LED delivers 140 lpw
- Suitable for Wet Locations
- Motion Sensor Available
- Zigbee Integration Available
- Microwave Sensor Available

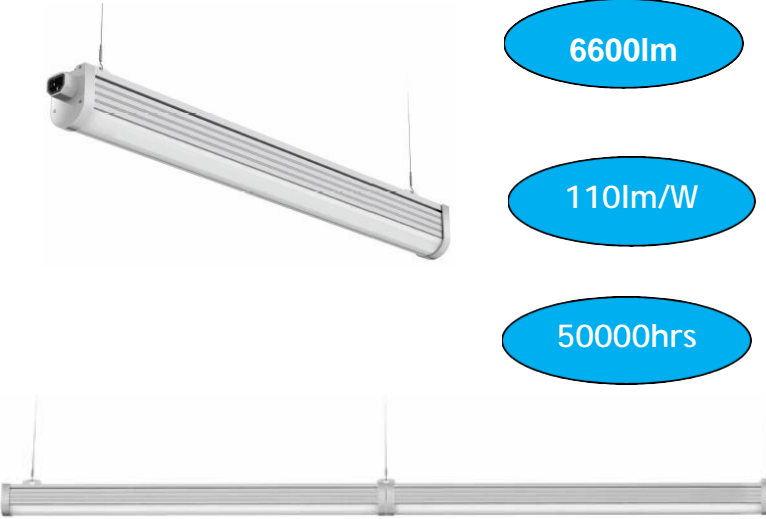

DIMENSIONS

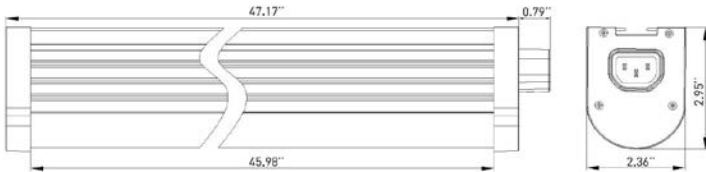

APPLICATIONS

- Supermarket
- Retail
- Industrial
- Commercial

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
60W	AC120-277V	6600 lm	120 degrees	4000K/5000K/ 6000K	>80
Efficiency	PF	Type	IP	Rated Life	Approvals
110lm/W	>0.95	EC1	65	50000hrs	UL/cUL,

ORDERING GUIDE

Example: GG-EC1-60W-850-CM

Company	Type	Watts	CCT	Cover
GG - Global Green	EC1	60W	840 - CRI80, 4000K 850 - CRI80, 5000K 860 - CRI80, 6000K	CM- Cilieng Mount SM- Surface Mount