




GLOBAL GREEN CORPORATION




# LED Flood Light

Wall and Surface Mount

## FEATURES

- Phillips Chips
- Type B Ballast By Pass 100-277AC
- Replaces 175W MH
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 4000K, 5000K, 6000K
- Meanwell Driver
- Up to 80% energy savings
- Ultra-high performance LED delivers 120 lpw
- Suitable for dry or damp locations

## DIMENSIONS

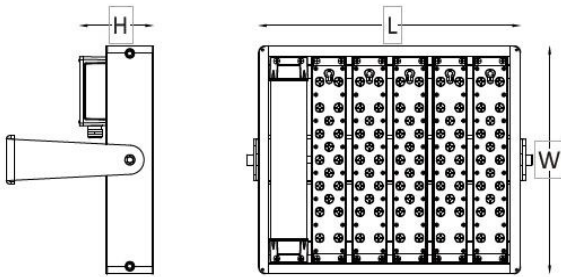

## APPLICATIONS

- Industrial Parks
- Strip Malls
- Warehouses
- Parking Garages
- Subways
- Underground parking lots

## SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
30W	AC120-277V	3600 lm	180 degrees /4000K/5000k/6000K		>80
Efficiency	PF	Style	Install	Rated Life	Approvals
120lm/W	>0.95	Flood Light	Wall Mount	50000hrs	UL/cUL,DLC V4.0

## ORDERING GUIDE

Example: GG-FLD-2-30W-840

Company	Series	Type	Watts	CCT	Mode
GG - Global Green	Flood Light: FLD-2		30W	840 -CRI80, 4000K	
				850 -CRI80, 5000K	
				860 -CRI80, 6000K	



GLOBAL GREEN CORPORATION



60 Watt

80 CRI

50000hrs




# LED Flood Light

Wall and Surface Mount

## FEATURES

- Phillips Chips
- Type B Ballast By Pass 100-277AC
- Replaces 175W MH
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 4000K, 5000K, 6000K
- Meanwell Driver
- Up to 80% energy savings
- Ultra-high performance LED delivers 120 lpw
- Suitable for dry or damp locations

## DIMENSIONS

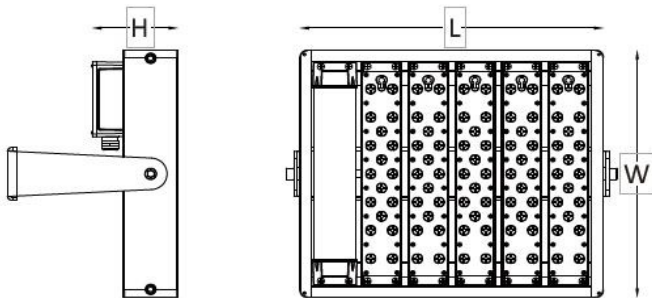

## APPLICATIONS

- Industrial Parks
- Strip Malls
- Warehouses
- Parking Garages
- Subways
- Underground parking lots

## SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
60W	AC120-277V	7200 lm	180 degrees /4000K/5000k/6000K		>80
Efficiency	PF	Style	Install	Rated Life	Approvals
120lm/W	>0.95	Flood Light	Wall Mount	50000hrs	UL/cUL,DLC V4.0

## ORDERING GUIDE

Example: GG-FLD-2-60W-840

Company	Series	Type	Watts	CCT	Mode	
GG - Global Green	Flood Light: FLD-2		840	-CRI80, 4000K		
			60W	850	-CRI80, 5000K	
				860	-CRI80, 6000K	



GLOBAL GREEN CORPORATION

# LED Flood Light

Wall and Surface Mount

## FEATURES

- Phillips Chips
- Type B Ballast By Pass 100-277AC
- Replaces 250W MH
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 4000K, 5000K, 6000K
- Meanwell Driver
- Up to 80% energy savings
- Ultra-high performance LED delivers 120 lpw
- Suitable for dry or damp locations



Phillips 3030


90 Watt

80 CRI

50000hrs



## DIMENSIONS

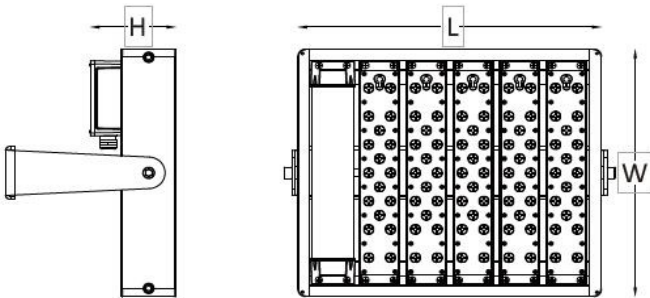

## APPLICATIONS

- Industrial Parks
- Strip Malls
- Warehouses
- Parking Garages
- Subways
- Underground parking lots

## SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
90W	AC120-277V	10800 lm	180 degrees /4000K/5000k/6000K		>80
Efficiency	PF	Style	Install	Rated Life	Approvals
120lm/W	>0.95	Flood Light	Wall Mount	50000hrs	UL/cUL,DLC V4.0

## ORDERING GUIDE

Example: GG-FLD-2-90W-840

Company	Series	Type	Watts	CCT	Mode
GG - Global Green	Flood Light: FLD-2		90W	840 -CRI80, 4000K	
				850 -CRI80, 5000K	
				860 -CRI80, 6000K	



GLOBAL GREEN CORPORATION

Phillips 3030

150 Watt

80 CRI

50000hrs




# LED Flood Light

Wall and Surface Mount

## FEATURES

- Phillips Chips
- Type B Ballast By Pass 100-277AC
- Replaces 400W MH
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 4000K, 5000K, 6000K
- Meanwell Driver
- Up to 80% energy savings
- Ultra-high performance LED delivers 120 lpw
- Suitable for dry or damp locations

## DIMENSIONS

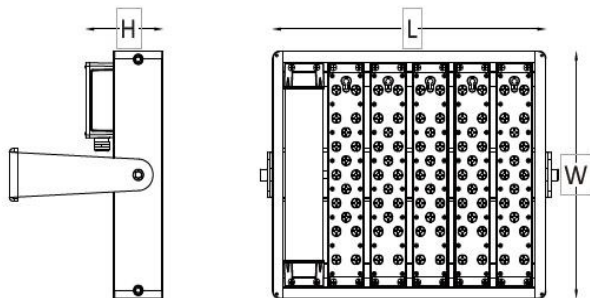

## APPLICATIONS

- Industrial Parks
- Strip Malls
- Warehouses
- Parking Garages
- Subways
- Underground parking lots

## SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
150W	AC120-277V	18000 lm	180 degrees /4000K/5000k/6000K		>80
Efficiency	PF	Style	Install	Rated Life	Approvals
120lm/W	>0.95	Flood Light	Wall Mount	50000hrs	UL/cUL,DLC V4.0

## ORDERING GUIDE

Example: GG-FLD-2-150W-840

Company	Series	Type	Watts	CCT	Mode	
GG - Global Green	Flood Light: FLD-2		840	-CRI80, 4000K		
			150W	850	-CRI80, 5000K	
			860	-CRI80, 6000K		



GLOBAL GREEN CORPORATION

# LED Flood Light

Wall and Surface Mount



Phillips 3030

200 Watt

80 CRI


50000hrs



## FEATURES

- Phillips Chips
- Type B Ballast By Pass 100-277AC
- Replaces 1000W MH
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 4000K, 5000K, 6000K
- Meanwell Driver
- Up to 80% energy savings
- Ultra-high performance LED delivers 120 lpw
- Suitable for dry or damp locations

## DIMENSIONS

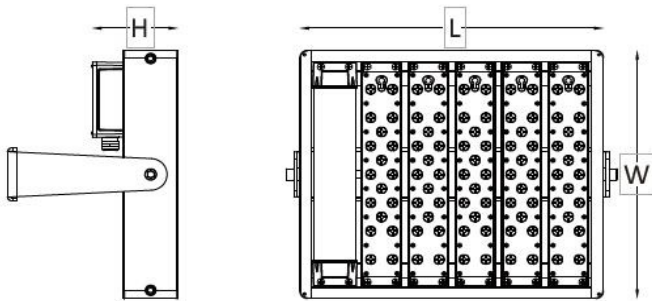

## APPLICATIONS

- Industrial Parks
- Strip Malls
- Warehouses
- Parking Garages
- Subways
- Underground parking lots

## SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
200W	AC120-277V	24000 lm	180 degrees /4000K/5000k/6000K		>80
Efficiency	PF	Style	Install	Rated Life	Approvals
120lm/W	>0.95	Flood Light	Wall Mount	50000hrs	UL/cUL, DLC V4.0

## ORDERING GUIDE

Example: GG-FLD-2-200W-840

Company	Series	Type	Watts	CCT	Mode
GG - Global Green	Flood Light: FLD-2		300W	840	-CRI80, 4000K
				850	-CRI80, 5000K
				860	-CRI80, 6000K



GLOBAL GREEN CORPORATION



Phillips 3030

240 Watt

80 CRI

50000hrs




# LED Flood Light

Wall and Surface Mount

## FEATURES

- Phillips Chips
- Type B Ballast By Pass 100-277AC
- Replaces 1000W MH
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 4000K, 5000K, 6000K
- Meanwell Driver
- Up to 80% energy savings
- Ultra-high performance LED delivers 120 lpw
- Suitable for dry or damp locations

## DIMENSIONS

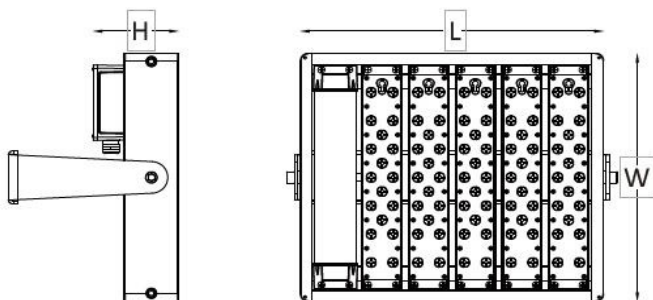

## APPLICATIONS

- Industrial Parks
- Strip Malls
- Warehouses
- Parking Garages
- Subways
- Underground parking lots

## SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
240W	AC120-277V	28800 lm	180 degrees /4000K/5000k/6000K		>80
Efficiency	PF	Style	Install	Rated Life	Approvals
120lm/W	>0.95	Flood Light	Wall Mount	50000hrs	UL/cUL,DLC V4.0

## ORDERING GUIDE

Example: GG-FLD-2-240W-840

Company	Series	Type	Watts	CCT	Mode
GG - Global Green	Flood Light: FLD-2		840	-CRI80, 4000K	
			850	-CRI80, 5000K	
			240W 860	-CRI80, 6000K	