

1 x 4 Slim Line LED Panel

Multiple Installation options: Surface - Suspension - Drop In



1 x 4

40 Watt

82 CRI

50000hrs




FEATURES

- Epistar 2835 Chips
- 100-277AC or 305 AC
- Dimmable
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 2700K, 3000K, 3500K, 4000K or 5000K
- Frosted lens for uniform diffuse appearance
- Up to 80% energy savings
- Ultra-high performance LED delivers 130 lpw
- Suitable for dry or damp locations
- Emergency Battery Back Up Available
- DALI Dimmable Driver Available



DIMENSIONS

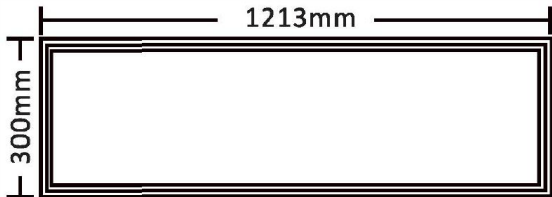

APPLICATIONS

- Schools
- Offices
- Warehouses
- Hospitals
- Subways
- Stores

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
40W	AC120-277V	5200 lm	120 degrees	2700K/3000K/3500k/4000K	>82
Efficiency	PF	Mode	EM Battery	Rated Life	Approvals
130lm/W	>0.95	Dimmable or Dali	20 W	50000hrs	UL/cUL,

ORDERING GUIDE

Example: GG-1X4-DIM-40W-840

Company	Series	Mode	Watts	CCT
GG - Global Green	1x4	DIM- DALI	40	830 - CRI80, 3000K
				835 - CRI80, 3500K
				840 - CRI80, 4000K



GLOBAL GREEN CORPORATION

1 x 4 Slim Line Panel

Multiple Installation options: Surface - Suspension - Drop In



1 x 4

45 Watt

82 CRI

50000hrs



FEATURES

- Epistar 2835 Chips
- 100-277AC or 305 AC
- Dimmable
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 2700K, 3000K, 3500K, 4000K or 5000K
- Frosted lens for uniform diffuse appearance
- Up to 80% energy savings
- Ultra-high performance LED delivers 130 lpw
- Suitable for dry or damp locations
- Emergency Battery Back Up Available
- DALI Dimmable Driver Available



DIMENSIONS



APPLICATIONS

- Schools
- Offices
- Warehouses
- Hospitals
- Subways
- Stores

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
45W	AC120-277V	5,850 lm	120 degrees	2700K/3000K/3500k/4000K	>82
Efficiency	PF	Mode	EM Battery	Rated Life	Approvals
130lm/W	>0.95	Dimmable or Dali	20W	50000hrs	UL/cUL, DLC V4.1


ORDERING GUIDE

Example: GG-1x4-DIM-45W-840

Company	Series	Type	Watts	CCT
GG - Global Green	1x4	DIM- DALI	45	830 - CRI80, 3000K
				835 - CRI80, 3500K
				840 - CRI80, 4000K

2 x 2 Slim Line LED Panel

Multiple Installation options: Surface - Suspension - Drop In



2 x 2

40 Watt

82 CRI

50000hrs




FEATURES

- Epistar 2835 Chips
- 100-277AC or 305 AC
- Dimmable
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 2700K, 3000K, 3500K, 4000K or 5000K
- Frosted lens for uniform diffuse appearance
- Up to 80% energy savings
- Ultra-high performance LED delivers 130 lpw
- Suitable for dry or damp locations
- Emergency Battery Back Up Available
- DALI Dimmable Driver Available



DIMENSIONS



APPLICATIONS

- Schools
- Offices
- Warehouses
- Hospitals
- Subways
- Stores

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
40W	AC120-277V	5200 lm	120 degrees	2700K/3000K/3500k/4000K	>82
Efficiency	PF	Mode	EM Battery	Rated Life	Approvals
130lm/W	>0.95	Dimmable or Dali	20 W	50000hrs	UL/cUL,


ORDERING GUIDE

Example: GG-2X2-DIM-40W-840

Company	Series	Mode	Watts	CCT
GG - Global Green	2x2	DIM- DALI	40	830 - CRI80, 3000K
				835 - CRI80, 3500K
				840 - CRI80, 4000K

2 x 2 Slim Line Panel

Multiple Installation options: Surface - Suspension - Drop In



2 x 2

50 Watt

82 CRI

50000hrs




FEATURES

- Epistar 2835 Chips
- 100-277AC or 305 AC
- Dimmable
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 2700K, 3000K, 3500K, 4000K or 5000K
- Frosted lens for uniform diffuse appearance
- Up to 80% energy savings
- Ultra-high performance LED delivers 130 lpw
- Suitable for dry or damp locations
- Emergency Battery Back Up Available
- DALI Dimmable Driver Available



DIMENSIONS

APPLICATIONS



- Schools
- Offices
- Warehouses
- Hospitals
- Subways
- Stores

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
50W	AC120-277V	6,500 lm	120 degrees	2700K/3000K/3500k/4000K	>82
Efficiency	PF	Mode	EM Battery	Rated Life	Approvals
130lm/W	>0.95	Dimmable or Dali	20W	50000hrs	UL/cUL, DLC V4.1

ORDERING GUIDE

Example: GG-2x2-DIM-50W-840

Company	Series	Type	Watts	CCT
GG - Global Green	3x2	DIM- DALI	50	830 - CRI80, 3000K
				835 - CRI80, 3500K
				840 - CRI80, 4000K



GLOBAL GREEN CORPORATION

2 x 4 Slim Line LED Panel

Multiple Installation options: Surface - Suspension - Drop In



2 x 4

40 Watt

82 CRI

50000hrs




FEATURES

- Epistar 2835 Chips
- 100-277AC or 305 AC
- Dimmable
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 2700K, 3000K, 3500K, 4000K or 5000K
- Frosted lens for uniform diffuse appearance
- Up to 80% energy savings
- Ultra-high performance LED delivers 130 lpw
- Suitable for dry or damp locations
- Emergency Battery Back Up Available
- DALI Dimmable Driver Available



DIMENSIONS

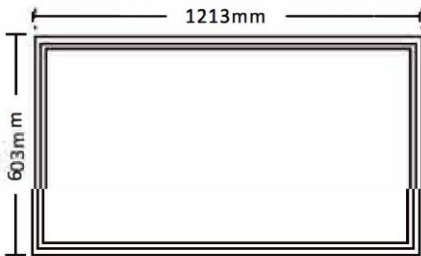

APPLICATIONS

- Schools
- Offices
- Warehouses
- Hospitals
- Subways
- Stores

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
40W	AC120-277V	5200 lm	120 degrees	2700K/3000K/3500k/4000K	>82
Efficiency	PF	Mode	EM Battery	Rated Life	Approvals
130lm/W	>0.95	Dimmable or Dali	20 W	50000hrs	UL/cUL, DLC V4.1

ORDERING GUIDE

Example: GG-2X4-DIM-40W-840

Company	Series	Mode	Watts	CCT
GG - Global Green	4x2	DIM- DALI	40	830 - CRI80, 3000K
				835 - CRI80, 3500K
				840 - CRI80, 4000K



GLOBAL GREEN CORPORATION

2 x 4 Slim Line Panel

Multiple Installation options: Surface - Suspension - Drop In



2 x 4

60 Watt

82 CRI

50000hrs




FEATURES

- Epistar 2835 Chips
- 100-277AC or 305 AC
- Dimmable
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 2700K, 3000K, 3500K, 4000K or 5000K
- Frosted lens for uniform diffuse appearance
- Up to 80% energy savings
- Ultra-high performance LED delivers 130 lpw
- Suitable for dry or damp locations
- Emergency Battery Back Up Available
- DALI Dimmable Driver Available



DIMENSIONS



APPLICATIONS

- Schools
- Offices
- Warehouses
- Hospitals
- Subways
- Stores

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
60W	AC120-277V	7,800 lm	120 degrees	2700K/3000K/3500k/4000K	>82
Efficiency	PF	Mode	EM Battery	Rated Life	Approvals
130lm/W	>0.95	Dimmable or Dali	20W	50000hrs	UL/cUL,DLC V4.1

ORDERING GUIDE

Example: GG-2x4-DIM-60W-840

Company	Series	Type	Watts	CCT
GG - Global Green	2x4	DIM- DALI	60	830 - CRI80, 3000K
				835 - CRI80, 3500K
				840 - CRI80, 4000K