




GLOBAL GREEN CORPORATION

2 x 2 LED Troffer/ Retrofit Kit

Multiple Installation options: Surface - Suspension - Drop In



2 x 2

40 Watt

82 CRI

50000hrs




FEATURES

- Epistar 2835 Chips
- 100-277AC or 305 AC
- Dimmable
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 2700K, 3000K, 3500K, 4000K or 5000K
- Frosted lens for uniform diffuse appearance
- Up to 80% energy savings
- Ultra-high performance LED delivers 130 lpw
- Suitable for dry or damp locations
- Emergency Battery Back Up Available
- DALI Dimmable Driver Available



DIMENSIONS

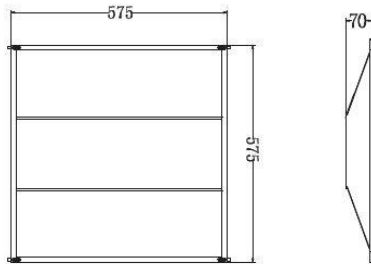

APPLICATIONS

- Schools
- Offices
- Warehouses
- Hospitals
- Subways
- Stores

SPECIFICATIONS

| Watts | Volts | Lumens | Beam Angle | CCT | CRI |
|------------|------------|------------------|-------------|-------------------------|-----------|
| 40W | AC120-277V | 5200 lm | 120 degrees | 2700K/3000K/3500k/4000K | >82 |
| Efficiency | PF | Mode | EM Battery | Rated Life | Approvals |
| 130lm/W | >0.95 | Dimmable or Dali | 20 W | 50000hrs | UL/cUL, |

ORDERING GUIDE

Example: GG-2X2-DIM-TRF-40W-840


| Company | Series | Mode | Style | Watts | CCT |
|-------------------|--------|-----------|-------|-------|--------------------|
| GG - Global Green | 2x2 | DIM- DALI | TRF | 40 | 830 - CRI80, 3000K |
| | | | | | 835 - CRI80, 3500K |
| | | | | | 840 - CRI80, 4000K |



GLOBAL GREEN CORPORATION

2 x 2 LED Troffer/ Retrofit Kit

Multiple Installation options: Surface - Suspension - Drop In

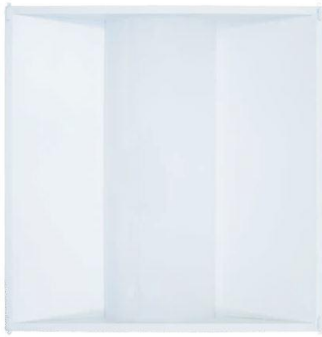

2 x 2

50 Watt

82 CRI

50000hrs




FEATURES

- Epistar 2835 Chips
- 100-277AC or 305 AC
- Dimmable
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 2700K, 3000K, 3500K, 4000K or 5000K
- Frosted lens for uniform diffuse appearance
- Up to 80% energy savings
- Ultra-high performance LED delivers 130 lpw
- Suitable for dry or damp locations
- Emergency Battery Back Up Available
- DALI Dimmable Driver Available



DIMENSIONS

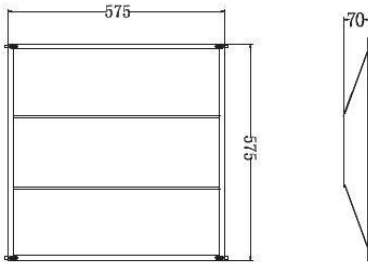

APPLICATIONS

- Schools
- Offices
- Warehouses
- Hospitals
- Subways
- Stores

SPECIFICATIONS

| Watts | Volts | Lumens | Beam Angle | CCT | CRI |
|------------|------------|------------------|-------------|-------------------------|------------------|
| 50W | AC120-277V | 6,500 lm | 120 degrees | 2700K/3000K/3500k/4000K | >82 |
| Efficiency | PF | Mode | EM Battery | Rated Life | Approvals |
| 130lm/W | >0.95 | Dimmable or Dali | 20W | 50000hrs | UL/cUL, DLC V4.1 |

ORDERING GUIDE

Example: GG-2x2-DIM-TRF-50W-840


| Company | Series | Type | Style | Watts | CCT |
|-------------------|--------|-----------|-------|-------|--------------------|
| GG - Global Green | 2x2 | DIM- DALI | TRF | 50 | 830 - CRI80, 3000K |
| | | | | | 835 - CRI80, 3500K |
| | | | | | 840 - CRI80, 4000K |



GLOBAL GREEN CORPORATION

2 x 4 LED Troffer/ Retrofit Kit

Multiple Installation options: Surface - Suspension - Drop In

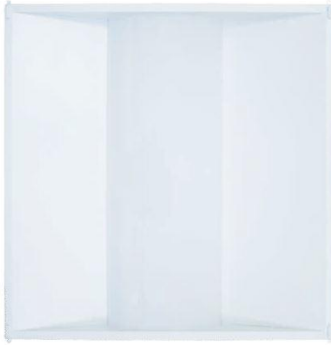

2 x 4

40 Watt

82 CRI

50000hrs




FEATURES

- Epistar 2835 Chips
- 100-277AC or 305 AC
- Dimmable
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 2700K, 3000K, 3500K, 4000K or 5000K
- Frosted lens for uniform diffuse appearance
- Up to 80% energy savings
- Ultra-high performance LED delivers 130 lpw
- Suitable for dry or damp locations
- Emergency Battery Back Up Available
- DALI Dimmable Driver Available



DIMENSIONS

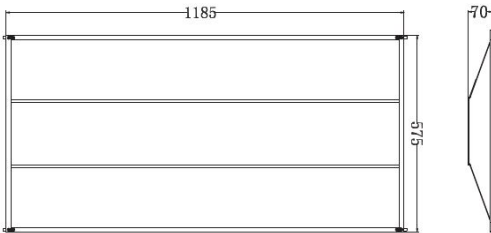

APPLICATIONS

- Schools
- Offices
- Warehouses
- Hospitals
- Subways
- Stores

SPECIFICATIONS

| Watts | Volts | Lumens | Beam Angle | CCT | CRI |
|------------|------------|------------------|-------------|-------------------------|------------------|
| 40W | AC120-277V | 5200 lm | 120 degrees | 2700K/3000K/3500k/4000K | >82 |
| Efficiency | PF | Mode | EM Battery | Rated Life | Approvals |
| 130lm/W | >0.95 | Dimmable or Dali | 20 W | 50000hrs | UL/cUL, DLC V4.1 |

ORDERING GUIDE

Example: GG-2X4-DIM-TRF-40W-840

| Company | Series | Mode | Style | Watts | CCT |
|-------------------|--------|-----------|-------|-------|--------------------|
| GG - Global Green | 2x4 | DIM- DALI | TRF | 40 | 830 - CRI80, 3000K |
| | | | | | 835 - CRI80, 3500K |
| | | | | | 840 - CRI80, 4000K |



GLOBAL GREEN CORPORATION

2 x 4 LED Troffer/ Retrofit Kit

Multiple Installation options: Surface - Suspension - Drop In

FEATURES

- Epistar 2835 Chips
- 100-277AC or 305 AC
- Dimmable
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 2700K, 3000K, 3500K, 4000K or 5000K
- Frosted lens for uniform diffuse appearance
- Up to 80% energy savings
- Ultra-high performance LED delivers 130 lpw
- Suitable for dry or damp locations
- Emergency Battery Back Up Available
- DALI Dimmable Driver Available



2 x 4

60 Watt


82 CRI

50000hrs



DIMENSIONS

APPLICATIONS

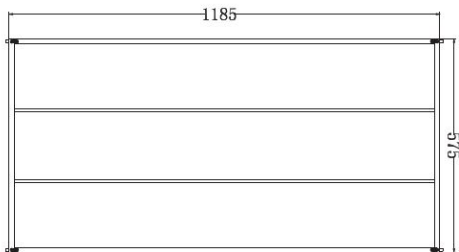

- Schools
- Offices
- Warehouses
- Hospitals
- Subways
- Stores

SPECIFICATIONS

| Watts | Volts | Lumens | Beam Angle | CCT | CRI |
|------------|------------|------------------|-------------|-------------------------|------------------|
| 60W | AC120-277V | 7,800 lm | 120 degrees | 2700K/3000K/3500k/4000K | >82 |
| Efficiency | PF | Mode | EM Battery | Rated Life | Approvals |
| 130lm/W | >0.95 | Dimmable or Dali | 20W | 50000hrs | UL/cUL, DLC V4.1 |

ORDERING GUIDE

Example: GG-2x4-DIM-TRF-60W-840

| Company | Series | Type | Style | Watts | CCT |
|-------------------|--------|-----------|-------|-------|--------------------|
| GG - Global Green | 2x4 | DIM- DALI | TRF | 60 | 830 - CRI80, 3000K |
| | | | | | 835 - CRI80, 3500K |
| | | | | | 840 - CRI80, 4000K |