



GLOBAL GREEN CORPORATION



12W

1800lm

150lm/W

50000hrs



5 YEAR WARRANTY


Nano LED Tube PC or Glass

Ballast Compatible/Ballast Bypass: work with or without ballasts.

FEATURES

- Type A or Type B: plug & play or direct line voltage
- Direct replacement for conventional linear fluorescent tubes
- Instant on
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 3000K, 4000K or 5000K
- Frosted lens for uniform diffuse appearance
- Up to 80% energy savings
- Ultra-high performance LED delivers 140 lpw
- Suitable for dry or damp locations

DIMENSIONS



	A	B	C
2ft	588mm	595mm	603mm
4ft	1198mm	1205mm	1213mm

APPLICATIONS

- Schools
- Offices
- Warehouses
- Hospitals
- Subways
- Stores
- Underground parking lots

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
12W	AC120-277V	1800 lm	120 degrees	3000K/4000K/ 5000K	>80
Efficiency	PF	Series	Shape	Rated Life	Approvals
150lm/W	>0.95	Nano	T-8	50000hrs	UL/cUL, DLC v4.0

ORDERING GUIDE

Example: GG-PC-B-12W-850-F

Company	Series	Type	Watts	CCT	Cover
GG - Global Green	PC or G	A or B: UL Type A-B	12W	830 - CRI80, 3000K 840 - CRI80, 4000K	F- Frosted C- Clear

Nano LED Tube PC or Glass

Ballast Compatible/Ballast Bypass: work with or without ballasts.



15W

2250lm

150lm/W


50000hrs



FEATURES

- Type A or Type B: plug & play or direct line voltage
- Direct replacement for conventional linear fluorescent tubes
- Instant on
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 3000K, 4000K or 5000K
- Frosted lens for uniform diffuse appearance
- Up to 80% energy savings
- Ultra-high performance LED delivers 140 lpw
- Suitable for dry or damp locations

DIMENSIONS



	A	B	C
2ft	588mm	595mm	603mm
4ft	1198mm	1205mm	1213mm

APPLICATIONS

- Schools
- Offices
- Warehouses
- Hospitals
- Subways
- Stores
- Underground parking lots

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
15W	AC120-277V	2250 lm	120 degrees	3000K/4000K/ 5000K	>80
Efficiency	PF	Series	Shape	Rated Life	Approvals
150lm/W	>0.95	Nano	T-8	50000hrs	UL/cUL, DLC v4.0

ORDERING GUIDE

Example: GG-PC-B-15W-850-F

Company	Series	Type	Watts	CCT	Cover
GG - Global Green	PC or G	A or B: UL Type A-B	15W	830 - CRI80, 3000K 840 - CRI80, 4000K	F- Frosted C- Clear



GLOBAL GREEN CORPORATION

T8 LED Tube Type A - B- AB

Ballast Compatible/Ballast Bypass: work with or without ballasts.



16W

2240lm

140lm/W

50000hrs




FEATURES

- Dual mode: plug & play or direct line voltage
- Direct replacement for conventional linear fluorescent tubes
- Instant on
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 3000K, 4000K or 5000K
- Frosted lens for uniform diffuse appearance
- Up to 80% energy savings
- Ultra-high performance LED delivers 140 lpw
- Suitable for dry or damp locations



DIMENSIONS

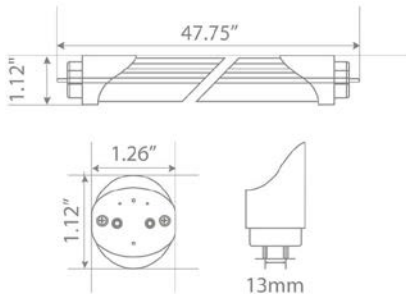

APPLICATIONS

- Schools
- Offices
- Warehouses
- Hospitals
- Subways
- Stores
- Underground parking lots

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
16W	AC120-277V	2240 lm	120 degrees	3000K/4000K/ 5000K	>80
Efficiency	PF	Base	Shape	Rated Life	Approvals
140lm/W	>0.95	G13	T-8	50000hrs	UL/cUL, DLC v4.0

ORDERING GUIDE

Example: GG-T8-AB-16W-850-F

Company	Series	Type	Watts	CCT	Cover
GG - Global Green	T8	AB: UL Type A-B-AB	16W	830 - CRI80, 3000K	F- frosted cover
				840 - CRI80, 4000K	C- clear cover
				850 - CRI80, 5000K	



GLOBAL GREEN CORPORATION



18W

2520lm

140lm/W

50000hrs




T8 LED Tube Type A - B- AB

Ballast Compatible/Ballast Bypass: work with or without ballasts.

FEATURES

- Dual mode: plug & play or direct line voltage
- Direct replacement for conventional linear fluorescent tubes
- Instant on
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 3000K, 4000K or 5000K
- Frosted lens for uniform diffuse appearance
- Up to 80% energy savings
- Ultra-high performance LED delivers 140 lpw
- Suitable for dry or damp locations

DIMENSIONS

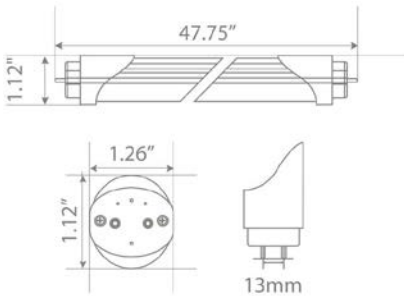

APPLICATIONS

- Schools
- Offices
- Warehouses
- Hospitals
- Subways
- Stores
- Underground parking lots

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
18W	AC120-277V	2520 lm	120 degrees	3000K/4000K/ 5000K	>80
Efficiency	PF	Base	Shape	Rated Life	Approvals
140lm/W	>0.95	G13	T-8	50000hrs	UL/cUL, DLC v4.0

ORDERING GUIDE

Example: GG-T8-AB-18W-850-F

Company	Series	Type	Watts	CCT	Cover
GG - Global Green	T8	AB: UL Type A-B-AB	18W	830 - CRI80, 3000K	F- frosted cover
				840 - CRI80, 4000K	C- clear cover
				850 - CRI80, 5000K	

T8 LED Tube Type A - B- AB

Ballast Compatible/Ballast Bypass: work with or without ballasts.



20W

2800lm

140lm/W

50000hrs




FEATURES

- Dual mode: plug & play or direct line voltage
- Direct replacement for conventional linear fluorescent tubes
- Instant on
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 3000K, 4000K or 5000K
- Frosted lens for uniform diffuse appearance
- Up to 80% energy savings
- Ultra-high performance LED delivers 140 lpw
- Suitable for dry or damp locations



DIMENSIONS

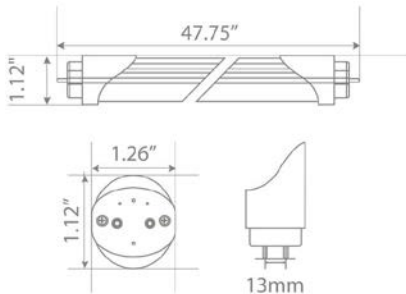

APPLICATIONS

- Schools
- Offices
- Warehouses
- Hospitals
- Subways
- Stores
- Underground parking lots

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
20W	AC120-277V	2800 lm	120 degrees	3000K/4000K/ 5000K	>80
Efficiency	PF	Base	Shape	Rated Life	Approvals
140lm/W	>0.95	G13	T-8	50000hrs	UL/cUL, DLC v4.0

ORDERING GUIDE

Example: GG-T8-AB-20W-850-F

Company	Series	Type	Watts	CCT	Cover
GG - Global Green	T8	AB: UL Type A-B-AB	20W	830 - CRI80, 3000K	F- frosted cover
				840 - CRI80, 4000K	C- clear cover
				850 - CRI80, 5000K	



GLOBAL GREEN CORPORATION

Nano LED Tube PC or Glass

Ballast Compatible/Ballast Bypass: work with or without ballasts.



12W

1800lm

150lm/W

50000hrs





5 YEAR WARRANTY

FEATURES

- Type A or Type B: plug & play or direct line voltage
- Direct replacement for conventional linear fluorescent tubes
- Instant on
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 3000K, 4000K or 5000K
- Frosted lens for uniform diffuse appearance
- Up to 80% energy savings
- Ultra-high performance LED delivers 140 lpw
- Suitable for dry or damp locations

DIMENSIONS

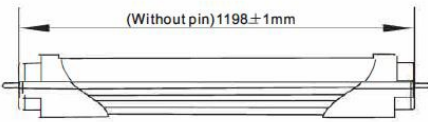

APPLICATIONS

- Schools
- Offices
- Warehouses
- Hospitals
- Subways
- Stores
- Underground parking lots

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
12W	AC120-277V	1800 lm	120 degrees	3000K/4000K/ 5000K	>80
Efficiency	PF	Series	Shape	Rated Life	Approvals
150lm/W	>0.95	USA	T-8	50000hrs	UL/cUL, DLC v4.0

ORDERING GUIDE

Example: GG-USA-B-12W-850-F

Company	Series	Type	Watts	CCT	Cover
GG - Global Green	USA	A or B: UL Type A-B	12W	830 - CRI80, 3000K 840 - CRI80, 4000K 850 - CRI80, 5000K	F- Frosted C- Clear



GLOBAL GREEN CORPORATION

Nano LED Tube PC or Glass

Ballast Compatible/Ballast Bypass: work with or without ballasts.



2700lm

150lm/W

50000hrs





FEATURES

- Type A or Type B: plug & play or direct line voltage
- Direct replacement for conventional linear fluorescent tubes
- Instant on
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 3000K, 4000K or 5000K
- Frosted lens for uniform diffuse appearance
- Up to 80% energy savings
- Ultra-high performance LED delivers 140 lpw
- Suitable for dry or damp locations



DIMENSIONS

APPLICATIONS

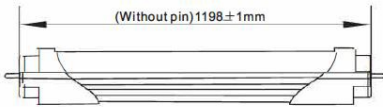

- Schools
- Offices
- Warehouses
- Hospitals
- Subways
- Stores
- Underground parking lots

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
18W	AC120-277V	2700 lm	120 degrees	3000K/4000K/ 5000K	>80
Efficiency	PF	Series	Shape	Rated Life	Approvals
150lm/W	>0.95	USA	T-8	50000hrs	UL/cUL, DLC v4.0

ORDERING GUIDE

Example: GG-USA-B-18W-850-F

Company	Series	Type	Watts	CCT	Cover
GG - Global Green	USA	A or B: UL Type A-B	18W	830 - CRI80, 3000K 840 - CRI80, 4000K 850 - CRI80, 5000K	F- Frosted C- Clear