



GLOBAL GREEN CORPORATION

LED Vapor Tight VP2

Dust - Moisture - Water Proof LED Vapor Tight



40W

5600lm

140lm/W


50000hrs



FEATURES

- Direct line voltage 100-277AC
- Replaces Conventional Vapor Tights and Linear High and Low Bay Lighting
- Instant on
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 4000K, 5000K or 6000K
- Frosted lens for uniform diffuse appearance
- Up to 80% energy savings
- Ultra-high performance LED delivers 140 lpw
- Suitable for Wet Locations
- Motion Sensor Available
- Zigbee Integration Available
- Microwave Sensor Available

DIMENSIONS

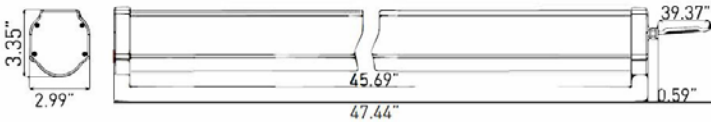

APPLICATIONS

- Parking Garage
- Stairwell
- Exterior Common Area
- Hospitals
- Subways
- Warehouse
- Industrial
- Underground parking lots

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
40W	AC120-277V	5600 lm	120 degrees	3000K/4000K/ 5000K	>80
Efficiency	PF	Type	IP	Rated Life	Approvals
140lm/W	>0.95	VP-2	65	50000hrs	UL/cUL, DLC v4.0

ORDERING GUIDE

Example: GG-VP-2-40W-850-CM

Company	Type	Watts	CCT	Cover
GG - Global Green	VP-2	40W	840 - CRI80, 4000K	CM- Cilieng Mount SM- Surface Mount
			850 - CRI80, 5000K	
			860 - CRI80, 6000K	



GLOBAL GREEN CORPORATION

LED Vapor Tight VP2

Dust - Moisture - Water Proof LED Vapor Tight



60W

8400lm

140lm/W


50000hrs



FEATURES

- Direct line voltage 100-277AC
- Replaces Conventional Vapor Tights and Linear High and Low Bay Lighting
- Instant on
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 4000K, 5000K or 6000K
- Frosted lens for uniform diffuse appearance
- Up to 80% energy savings
- Ultra-high performance LED delivers 140 lpw
- Suitable for Wet Locations
- Motion Sensor Available
- Zigbee Integration Available
- Microwave Sensor Available

DIMENSIONS

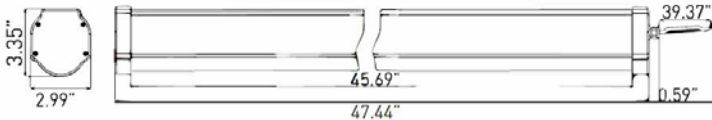

APPLICATIONS

- Parking Garage
- Stairwell
- Exterior Common Area
- Hospitals
- Subways
- Warehouse
- Industrial
- Underground parking lots

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
60W	AC120-277V	8400 lm	120 degrees	3000K/4000K/ 5000K	>80
Efficiency	PF	Type	IP	Rated Life	Approvals
140lm/W	>0.95	VP-2	65	50000hrs	UL/cUL, DLC v4.0

ORDERING GUIDE

Example: GG-VP-2-60W-850-CM

Company	Type	Watts	CCT	Cover
GG - Global Green	VP-2	60W	840 - CRI80, 4000K 850 - CRI80, 5000K 860 - CRI80, 6000K	CM- Cilieng Mount SM- Surface Mount