



LED Parking Street Lights

Multiple Beams Angles and Mounting Options



Phillips 3030




50000hrs



FEATURES

- Phillips Chips
- Direct Wire 100-277AC
- Replaces 400W MH
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 4000K, 5000K, 6000K
- Meanwell Driver
- Up to 80% energy savings
- Ultra-high performance LED delivers 120 lpw
- IP65 Water Proof
- Beam Angle 90* 135* Optics
- Dimmable Driver Available
- Mounting Bracket : Adjustable- Yoke- Direct

DIMENSIONS

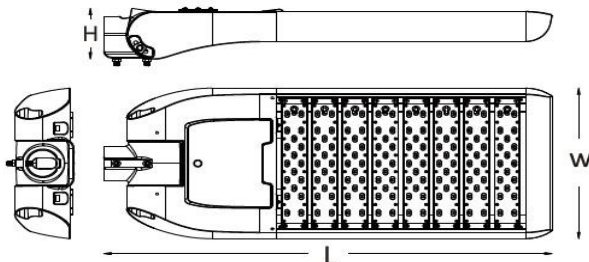

APPLICATIONS

- Municipal Roadway
- Strip Malls
- Warehouses
- Parking Lots
- Highways
- Underground parking lots

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
60W	AC120-277V	7200 lm	90/135 degrees /4000K/5000k/6000K		>80
Efficiency	PF	Style	Rated Life	Approvals	
120lm/W	>0.95	Adjustable/Direct/Yoke	50000hrs	UL/cUL, DLC V4.0	

ORDERING GUIDE



Example: GG-STRL-YKE-60W-840-DM

Company	Series	Mounting	Watts	CCT	Mode
GG - Global Green	Street Light: STRL-1	ADJ/YKE/DRT	60W	840 -CRI80, 4000K	Dimmable : DM
				850 -CRI80, 5000K	
				860 -CRI80, 6000K	

LED Parking Street Lights

Multiple Beams Angles and Mounting Options

Phillips 3030



50000hrs




FEATURES

- Phillips Chips
- Direct Wire 100-277AC
- Replaces 250W MH
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 4000K, 5000K, 6000K
- Meanwell Driver
- Up to 80% energy savings
- Ultra-high performance LED delivers 120 lpw
- IP65 Water Proof
- Beam Angle 90° 135° Optics
- Dimmable Driver Available
- Mounting Bracket : Adjustable- Yoke- Direct



DIMENSIONS

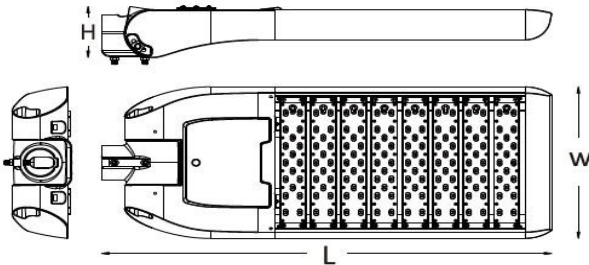

APPLICATIONS

- Municipal Roadways
- Strip Malls
- Warehouses
- Parking Lots
- Highway
- Underground parking lots

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
90W	AC120-277V	10800 lm	90/135 degrees	/4000K/5000k/6000K	>80
Efficiency	PF	Style	Rated Life	Approvals	
120lm/W	>0.95	Adjustable/Direct/Yoke	50000hrs	UL/cUL, DLC V4.0	

ORDERING GUIDE

Example: GG-STRL-1-YKE-90W-840-DM

Company	Series	Mounting	Watts	CCT	Mode
GG - Global Green	Street Light: STRL-1	ADJ/YKE/DRT	840	-CRI80, 4000K	Dimmable : DM
			90W	850 -CRI80, 5000K	
				860 -CRI80, 6000K	

LED Parking Street Lights

Multiple Beams Angles and Mounting Options

FEATURES

- Phillips Chips
- Direct Wire 100-277AC
- Replaces 250W MH
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 4000K, 5000K, 6000K
- Meanwell Driver
- Up to 80% energy savings
- Ultra-high performance LED delivers 120 lpw
- IP65 Water Proof
- Beam Angle 90* 135* Optics
- Dimmable Driver Available
- Mounting Bracket : Adjustable- Yoke- Direct



Phillips 3030


150 Watt

80 CRI

50000hrs



DIMENSIONS

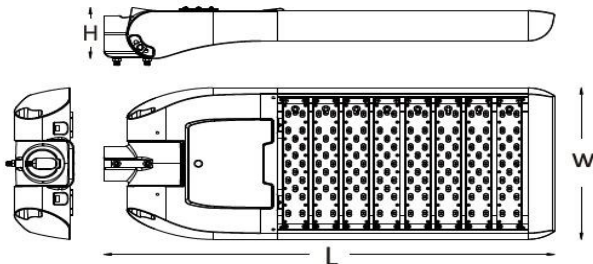

APPLICATIONS

- Municipal Roadways
- Strip Malls
- Warehouses
- Parking Lots
- Highway
- Underground parking lots

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
150W	AC120-277V	18000 lm	90/135 degrees /4000K/5000k/6000K		>80
Efficiency	PF	Style	Rated Life	Approvals	
120lm/W	>0.95	Adjustable/Direct/Yoke	50000hrs	UL/cUL, DLC V4.0	

ORDERING GUIDE

Example: DD-STRL-1-YKE-150W-840-DM

Company	Series	Mounting	Watts	CCT	Mode
GG - Global Green	Street Light: STRL	ADJ/YKE/DRT	150W	840 -CRI80, 4000K	Dimmable : DM
				850 -CRI80, 5000K	
				860 -CRI80, 6000K	

LED Parking Street Lights

Multiple Beams Angles and Mounting Options



Phillips 3030

210 Watt

80 CRI


50000hrs



FEATURES

- Phillips Chips
- Direct Wire 100-277AC
- Replaces 400W MH
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 4000K, 5000K, 6000K
- Meanwell Driver
- Up to 80% energy savings
- Ultra-high performance LED delivers 120 lpw
- IP65 Water Proof
- Beam Angle 90* 135* Optics
- Dimmable Driver Available
- Mounting Bracket : Adjustable- Yoke- Direct

DIMENSIONS

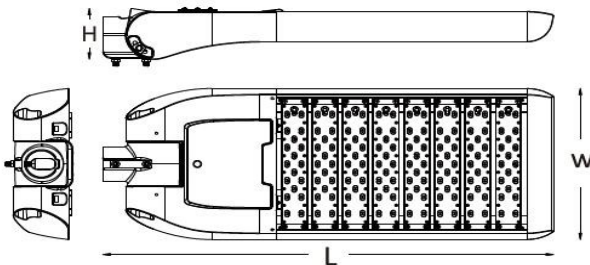

APPLICATIONS

- Municipal Roadways
- Strip Malls
- Warehouses
- Parking Lots
- Highway
- Underground parking lots

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
210W	AC120-277V	25200 lm	90/135 degrees /4000K/5000k/6000K		>80
Efficiency	PF	Style	Rated Life	Approvals	
120lm/W	>0.95	Adjustable/Direct/Yoke	50000hrs	UL/cUL, DLC V4.0	

ORDERING GUIDE

Example: GG-STRL-1-YKE-200W-840-DM

Company	Series	Mounting	Watts	CCT	Mode
GG - Global Green	Street Light: STRL-1	ADJ/YKE/DRT	200W	840 -CRI80, 4000K	Dimmable : DM
				850 -CRI80, 5000K	
				860 -CRI80, 6000K	

LED Parking Street Lights

Multiple Beams Angles and Mounting Options



Phillips 3030

240 Watt

80 CRI


50000hrs



FEATURES

- Phillips Chips
- Direct Wire 100-277AC
- Replaces 400W MH
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 4000K, 5000K, 6000K
- Meanwell Driver
- Up to 80% energy savings
- Ultra-high performance LED delivers 120 lpw
- IP65 Water Proof
- Beam Angle 90* 135* Optics
- Dimmable Driver Available
- Mounting Bracket : Adjustable- Yoke- Direct

DIMENSIONS

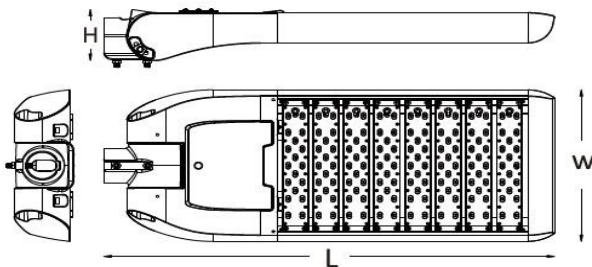

APPLICATIONS

- Municipal Roadways
- Strip Malls
- Warehouses
- Parking Lots
- Highway
- Underground parking lots

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
240W	AC120-277V	28800 lm	90/135 degrees /4000K/5000k/6000K		>80
Efficiency	PF	Style	Rated Life	Approvals	
120lm/W	>0.95	Adjustable/Direct/Yoke	50000hrs	UL/cUL, DLC V4.0	

ORDERING GUIDE

Example: GG-STRL-1-YKE-240W-840-DM

Company	Series	Mounting	Watts	CCT	Mode
GG - Global Green	Street Light: STRL-1	ADJ/YKE/DRT	240W	840 -CRI80, 4000K	Dimmable : DM
				850 -CRI80, 5000K	
				860 -CRI80, 6000K	

LED Parking Street Lights

Multiple Beams Angles and Mounting Options



Phillips 3030

300 Watt

80 CRI


50000hrs



FEATURES

- Phillips Chips
- Direct Wire 100-277AC
- Replaces 1000W MH
- Environmentally friendly; no mercury or lead
- 5 year product warranty
- Choice of 4000K, 5000K, 6000K
- Meanwell Driver
- Up to 80% energy savings
- Ultra-high performance LED delivers 120 lpw
- IP65 Water Proof
- Beam Angle 90* 135* Optics
- Dimmable Driver Available
- Mounting Bracket : Adjustable- Yoke- Direct

DIMENSIONS

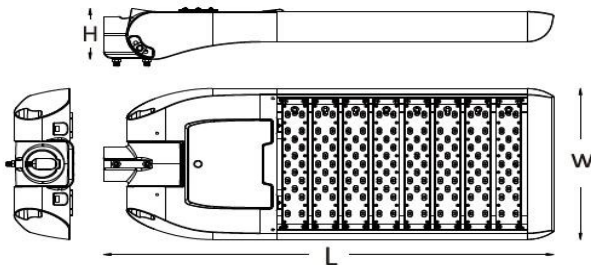

APPLICATIONS

- Municipal Roadways
- Strip Malls
- Warehouses
- Parking Lots
- Highway
- Underground parking lots

SPECIFICATIONS

Watts	Volts	Lumens	Beam Angle	CCT	CRI
300W	AC120-277V	36000 lm	90/135 degrees /4000K/5000k/6000K		>80
Efficiency	PF	Style	Rated Life	Approvals	
120lm/W	>0.95	Adjustable/Direct/Yoke	50000hrs	UL/cUL, DLC V4.0	

ORDERING GUIDE

Example: -STRL-1-YKE-300W-840-DM

Company	Series	Mounting	Watts	CCT	Mode
GG - Global Green	Street Light: STRL-1	ADJ/YKE/DRT	300W	840 -CRI80, 4000K	Dimmable : DM
				850 -CRI80, 5000K	
				860 -CRI80, 60GG00K	